


Your recycling needs. Our grinding solutions.

INJECTION MOULDING

Granulator for IMM up to 200 m/Tons, in line runners to150°C, cold scraps

Grinding of all plastics , from TPU to PA6.6, filled with glass up to 25%

Optimal in-feed of the regrind material into dosing and feeding system

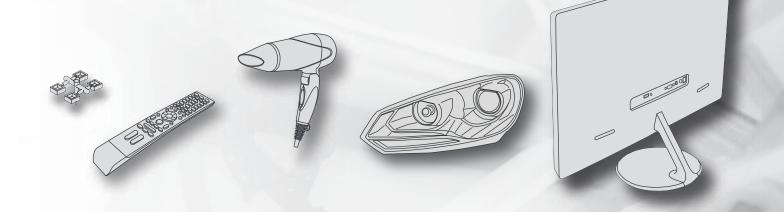

Regrind quality material

Homogeneous and uniform regrind constantly produced. Mechanical and physical properties of plastics unchanged.



 Rotary discs integral with the rotor and containment rings avoid overheating and dust production

Efficient solutions

Diverse production range of machines for recovery of scraps of varying size and weight maintenance reduced to the minimum.



- Shape, orientation and shutter of hoppers greatly reduce fly-back

Energy efficiency

Lowest running cost expressed in kWh/kg available on the market. Reaction power cos ϕ reduced to minimum thus having a direct impact on hourly energy cost.



Keys for the fixing of motor pulley and flywheelPulley and flywheel design gives higher inertia


Easy operation and maintenance

Reduced mainenance frequency and downtime by advance engineering design. Safety of operator during use and maintenance.



- Easy tool free access to screen, hopper, grinding chamber

System

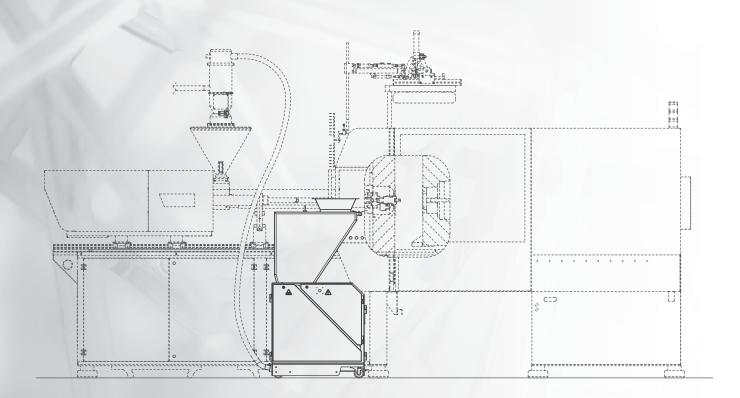

Our granulators



JM Series JM 2018



JM Series JM 3220 JM 4220



SMGL Series SMGL 100 SMGL 200



TRIA S.p.A. via E. Fermi, 8 20093 Cologno Monzese MI ITALIA tel 3 9.02.273451 fax 3 902.2542101 e-mail info@triaplastics.com www.triaplastics.com